
KÖHLER

Elevator & Escalator

KÖHLER

Elevator & Escalator

PRODUCT / BROCHURE

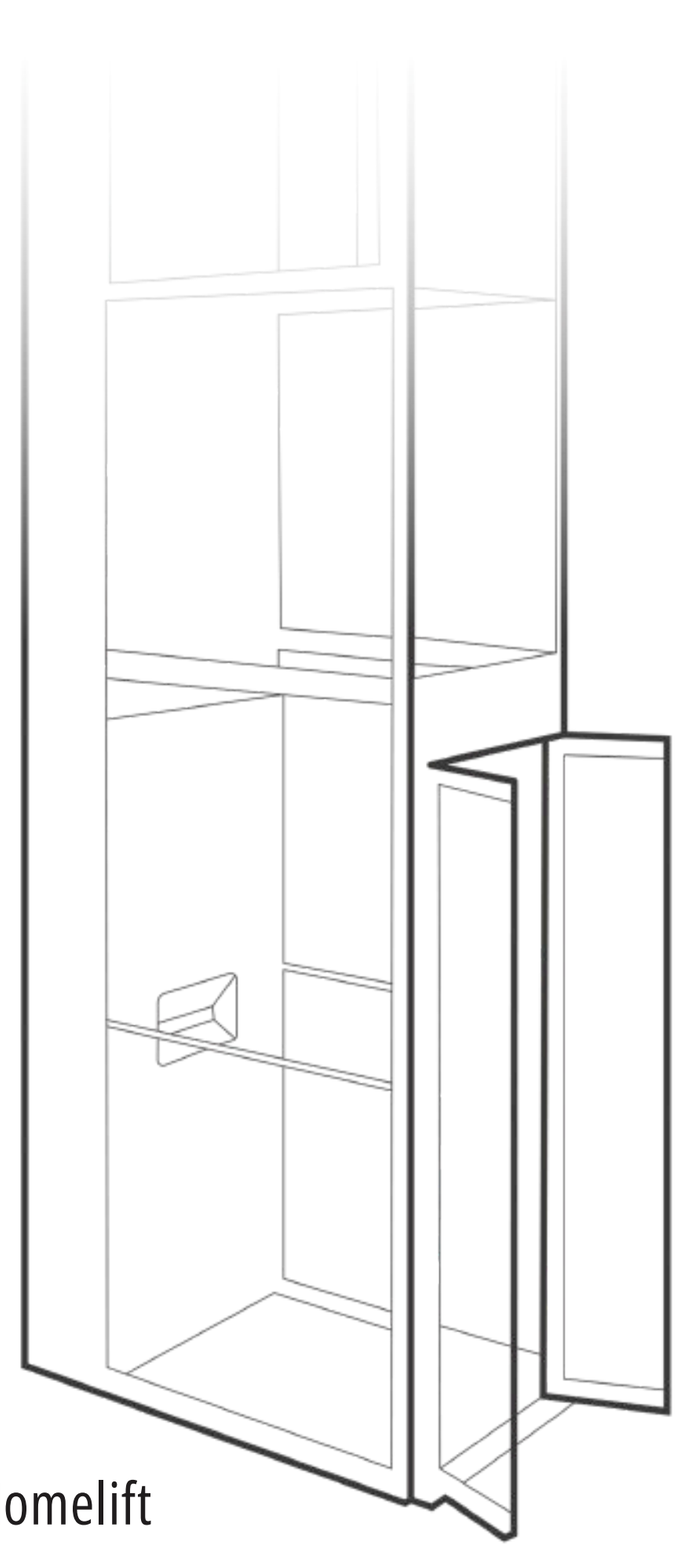

— Housty Homelift

Artistic Lifts Illuminate the Aesthetics of Life

KÖHLER
Elevator & Escalator

Safety Smart

Safety

Sensitive platform edges
Automatic Emergency leveling
Overload Protection
Wireless telephone
Emergency Stop button
Fire Emergency Return

Smart control system

Battery Monitoring System
Automatic Double Swing Doors
Intelligent Service Panel
Automatic Lubrication System
OTA(on the air)

UPS Emergency Landing

Even during power outages, our homelift operates on battery backup, ensuring safe descent to the ground floor. It also provides continuous 24-hour emergency lighting.




Artistic lift brightens aesthetics of life

KÖHLER
Elevator & Escalator

Stability

Screw-driven platform lifts feature four core technologies for a smooth, shock-free experience:

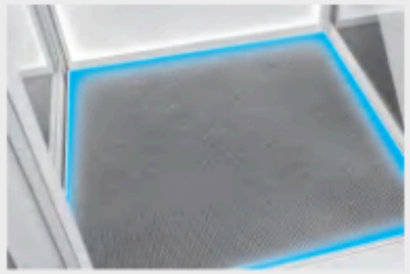

ELGO Speed Module(Germany)



Silent technology of Roller Guide Shoe Technology



Fully Automatic Door System




Integrated guide rail



Simplicity

The simpler the design, the more profound and powerful it becomes. Experience the minimalist beauty of our artistic homelifts. No Pit, No Shaft, No Machine Room Required. Simple mechanical structure without counterweight.

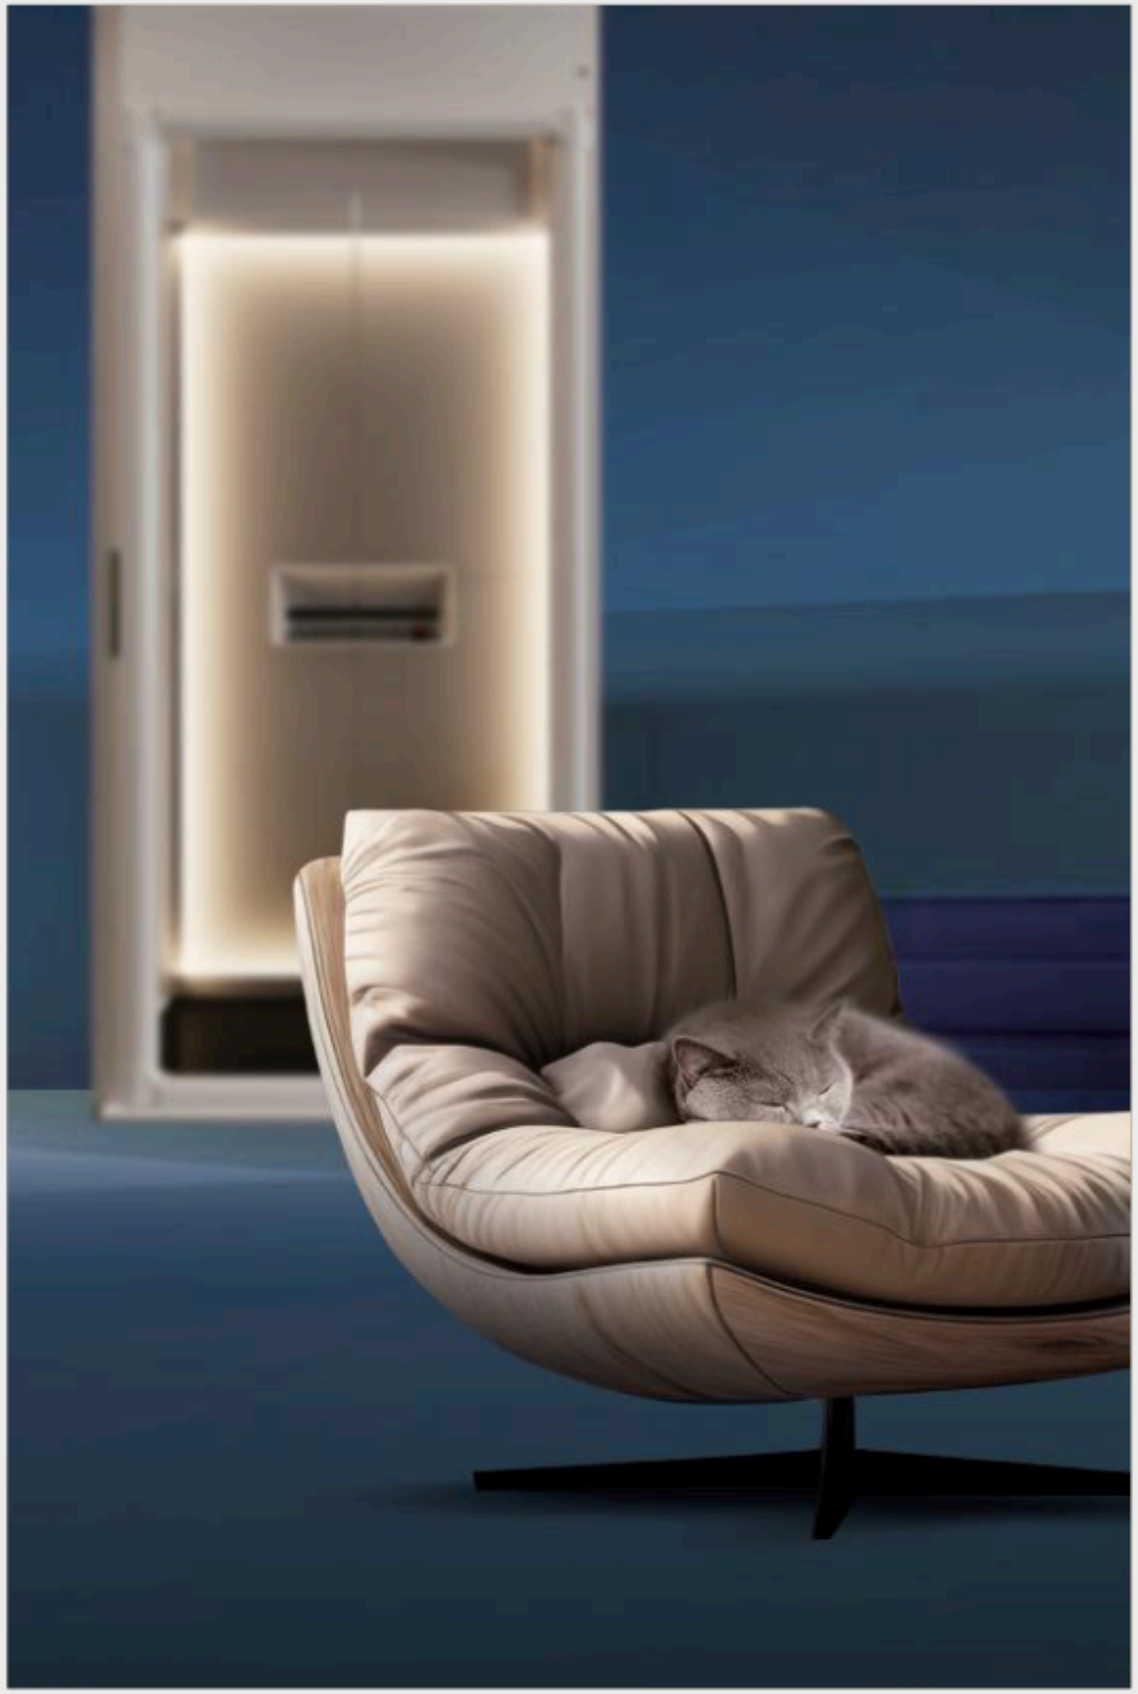


Silence

New generation hover brake system

Our next-generation brake system, powered by direct current, ensures active braking with reduced contact area, minimizing noise and wear for enhanced comfort.

Technology for a quieter ride

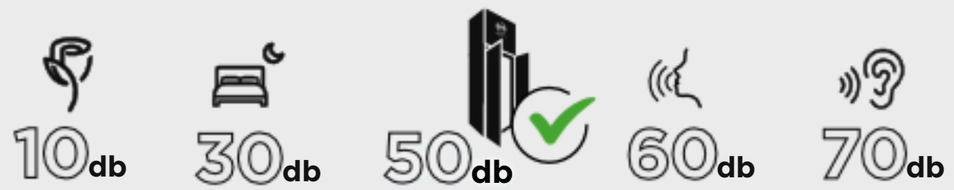

Aesthetics

Seamless, Rivet-Free Design

128 RGB

360° Panoramic Glass View

How to choose the right home-lift?

KÖHLER
Elevator & Escalator



CLASSICAL
HCSeries: Art-stylePlatform Lift



ELEGANT
HE Series: StandardPlatform Lift



ASTA
HA Series: InnovativeC-shaped platform lift



SPECIAL
HS Series: Customizableshaft-based platform lift

Technology & Aesthetics

The HC Series embodies the perfect blend of technology and aesthetics. Following our philosophy of simplifying complexity, it combines art and craftsmanship to deliver a smooth, quiet ride from start to finish, enhancing a more comfortable and imaginative life.


KÖHLER
Elevator & Escalator

CLASSICAL | HC

The Ultimate Integration of Technology and Aesthetics





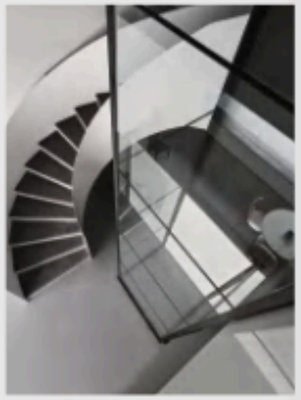

Our lifts represent the epitome of both technology and aesthetics, blending luxury and elegant design seamlessly into any home environment, becoming a unique piece of art for every homeowner.



Technical Standards

Product	Configuration description
Drive Mode	Screw Nut Drive Control
Control System	SSID Intelligent Control System
Door Lock System	Electronic and Mechanical Safety Interlock
Silent Brake System	SSG Brake System
Rolling Guide Shoes	Silent Operation, No Lubrication
Automatic Lubrication System	Continuous Lubrication, Extends Core Components' Lifespan
Wireless Emergency Communication	Can Store 3 Emergency Contact Numbers, One-touch Dial
Automatic Leveling on Power Outage	Dual Protection (Battery + Mechanical Handle)
Touch Control External Call	Precise Control, Easy Operation
Built-in Functions	SAFS Full Safety System, ID Intelligent Elevator Door, BASS Battery Monitoring System, OLP Overload Protection, UPS Backup Power Emergency Descent, etc.
Door Lock System	Electronic and Mechanical Safety Interlock
Emergency Brake	Respond to All Emergencies
Control Panel	Touch Panel, Precise Control, Easy Operation
Platform Safety Frame	Emergency Stop on Touch
Speed	Standard: 0.15m/s Optional: 0.3m/s
Shaft Profiles	Using High Grade (6005-T5) Aerospace Aluminum Profiles
Shaft Glass	Using Double-layer Laminated Explosion-proof Tempered Glass (5mm + 0.76mm + 5mm)
Sustainability	95% of Product Components are Recyclable
Technical Standards	Referencing European Standards EN81-41, European Machinery Directive 2006/42/EC

CLASSICAL | SIZE CHART

Width * Depth mm


S	M	L
Reserved depth: 1246mm AC door size: 660mm	Reserved depth: 1386mm AC door size: 800mm	Reserved depth: 1486mm AC door size: 900mm

HC1000
Reserved width: 935mm
B side door size: 660mm



Platform size: 855*600mm
Reserved size: 935*1011mm
Rated load: 250kg for 2-3 persons

HC1500
Reserved width: 1495mm
B side door size: 900mm



Platform size:1415*1075mm
Reserved size:1495*1486mm
Rated load: 400kg for 4-6 persons

HC1100
Reserved width: 1075mm B side door size: 800mm




Platform size: 995*835mm
Reserved size:1075*1246mm
Rated load: 250kg for 2-3 persons

Platform size: 995*975mm
Reserved size:1075*1386mm
Rated load: 400kg for 4-6 persons

Platform size: 995*1075mm
Reserved size:1075*1486mm
Rated load: 400kg for4-6 persons

HC1300
Reserved width: 1295mm B side door size: 900mm



Platform size: 1215*835mm
Reserved size: 1295*1246mm
Rated load: 400kg for 4-6 persons

Platform size: 1215*975mm
Reserved size: 1295*1386mm
Rated load: 400kg for 4-6 persons

Platform size: 1215*1075mm
Reserved size: 1295*1486mm
Rated load: 400kg for 4-6 persons

HC1000
Reserved width: 935mm
B side door size: 660mm




Platform size: 855*835mm
Reserved size: 935*1246mm
Rated load:250kg for 2-3 persons

Platform size:855*975mm
Reserved size:935*1386mm
Rated load:250kg for 2-3 persons

Platform size:855*1075mm
Reserved size:935*1486mm
Rated load: 250kg for 2-3 persons

HC1200
Reserved width: 1175mm B side door size: 900mm




Platform size: 1095*835mm
Reserved size: 1175*1246mm
Rated load: 400kg for 2-3 persons

Platform size: 1095*975mm
Reserved size: 1175*1386mm
Rated load:400kg for 4-6 persons

Platform size:1095*1075mm
Reserved size:1175*1486mm
Rated load: 400kg for4-6 persons

HC1400
Reserved width: 1395mm B side door size: 900mm

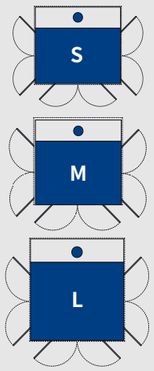

Platform size: 1315*835mm
Reserved size: 1395*1246mm
Rated load:400kg for 4-6 persons

Platform size: 1315*975mm
Reserved size: 1395*1386mm
Rated load:400kg for 4-6 persons

Platform size: 1315*1075mm
Reserved size: 1395*1486mm
Rated load:400kg for 4-6 persons

Elegant & Efficient

TheHESeriesusesadvancedscrew-driventechnology,providingasmooth,quiet,
and safe ride. It features:
-No Machine Room, No Pit Required
-High Space Utilization
-Semi-High Background Wall Design for added customization and enhanced comfort

Imported Nut & Screw	**6** Screw threads	**30** Years design life of the whole machine	**0** Ladder fall risk	**UPS** uninterruptible power supply 24 hours "extra long standby"

HOUSTELEGANT

pro

360-panoramic view.

Panoramic	Imported Nut& Screw	6 screw threads	30 years design lifeofthe whole machine	0 Ladder fall risk	UPS uninterruptible power supply 24 hours "extra long standby"



plus

Our sightseeing homelift o ers a 360-degree panoramic view, with a semi-high door option tailored for spaces with limited top clearance.

Half-Height Door (1400-1800mm)	Imported Nut& Screw	6 screw threads	30 years design lifeofthe whole machine	0 Ladder fall risk	UPS uninterruptible power supply24 hours "extralong standby"



Choosing the HE Series

	HE	HE Pro	HE Plus
Name	Standard	Four-Sided Panoramic Model	Half high door style
Panoramic View	Three sides	Four Sides	Three/four sides
Speed	0.15/0.3 m/s	0.15/0.3m /s	0.15/0.3 m/s
Color			
Opening method	Single door/double door	Single door/double door	Single door (top floor) Double doors are optional for other floors
Call button	Standard/fingerprint/face recognition	Standard/fingerprint/face recognition	Standard/fingerprint/face recognition
Background Wall	Standard/personalized pattern	Standard/personalized pattern	Standard/personalized pattern
Equipment Panel	Steel Plate	Glass	Glass(optional)
Top light	No Panoramic View Overhead light	Overhead Light	No Top, Open Design
Door height	2000mm	2000mm	Semi-high door 1400-1800mm
Shaft Lighting	Standard light	128 RGB Colors Available	No ceiling light
Equipment Panel Glass Frame	No	Ultra-Narrow	Ultra-Narrow
Screw	invisible	visible	Visible/invisible



- With European core technology and a screw-driven platform, the HE Series requires no pit or machine room.
- It o ers a 360-degree view and is designed for easy installation, making it ideal for various environments.

Nut&Screw Drive | Craftsmanship Quality | High-end Customization | Extraordinary Design

Product	Configuration description
Drive Mode	Screw Nut Drive Control
Control System	SSID Intelligent Control System
Door Lock System	Electronic and Mechanical Safety Interlock
Silent Brake System	SSG Brake System
Rolling Guide Shoes	Silent Operation, No Lubrication
Automatic Lubrication System	Continuous Lubrication, Extends Core Components' Lifespan
Wireless Emergency Communication	Can Store 3 Emergency Contact Numbers, One-touch Dial
Automatic Leveling on Power Outage	Dual Protection (Battery + Mechanical Handle)
Touch Control External Call	Precise Control, Easy Operation
Built-in Functions	SAFS Full Safety System, ID Intelligent Elevator Door, BASS Battery Monitoring System, OLP Overload Protection, UPS Backup Power Emergency Descent, etc.
Door Lock System	Electronic and Mechanical Safety Interlock
Emergency Brake	Respond to All Emergencies
Control Panel	Touch Panel, Precise Control, Easy Operation
Platform Safety Frame	Emergency Stop on Touch
Speed	Standard: 0.15m/s Optional: 0.3m/s
Shaft Profiles	Using High Grade (6005-T5) Aerospace Aluminum Profiles
Shaft Glass	Using Double-layer Laminated Explosion-proof Tempered Glass (5mm + 0.76mm + 5mm)
Sustainability	95% of Product Components are Recyclable
Technical Standards	Referencing European Standards EN81-41, European Machinery Directive 2006/42/EC

KÖHLER
Elevator & Escalator

ELEGANT | SIZE CHART

Width * Depth mm


S	M	L
Reserved depth: 1246mm AC door size: 660mm	Reserved depth: 1386mm AC door size: 800mm	Reserved depth: 1486mm AC door size: 900mm

HE1000

Reserved width: 935mm
B side door size: 660mm



Platform size: 855*835mm
Reserved size: 935*1246mm
Rated load: 250kg for 2-3 persons



Platform size: 855*975mm
Reserved size: 935*1386mm
Rated load: 250kg for 2-3 persons



Platform size: 855*1075mm
Reserved size: 935*1486mm
Rated load: 250kg for 2-3 persons

HE1000


Reserved width: 935mm
B side door size: 660mm



Platform size: 855*600mm
Reserved size: 935*1011mm
Rated load: 250kg for 2-3 persons

HE1500

Reserved width: 1495mm
B side door size: 900mm



Platform size: 1415*1075mm
Reserved size: 1495*1486mm
Rated load: 400kg for 4-6 persons

HE1100

Reserved width: 1075mm
B side door size: 800mm



Platform size: 995*835mm
Reserved size: 1075*1246mm
Rated load: 250kg for 2-3 persons



Platform size: 995*975mm
Reserved size: 1075*1386mm
Rated load: 400kg for 4-6 persons



Platform size: 995*1075mm
Reserved size: 1075*1486mm
Rated load: 400kg for 4-6 persons

HE1200

Reserved width: 1175mm
B side door size: 900mm



Platform size: 1095*835mm
Reserved size: 1175*1246mm
Rated load: 400kg for 2-3 persons




Platform size: 1095*975mm
Reserved size: 1175*1386mm
Rated load: 400kg for 4-6 persons



Platform size: 1095*1075mm
Reserved size: 1175*1486mm
Rated load: 400kg for 4-6 persons

HE1300

Reserved width: 1295mm
B side door size: 900mm



Platform size: 1215*835mm
Reserved size: 1295*1246mm
Rated load: 400kg for 4-6 persons




Platform size: 1215*975mm
Reserved size: 1295*1386mm
Rated load: 400kg for 4-6 persons




Platform size: 1215*1075mm
Reserved size: 1295*1486mm
Rated load: 400kg for 5-6 persons

HE1400

Reserved width: 1395mm
B side door size: 900mm




Platform size: 1315*835mm
Reserved size: 1395*1246mm
Rated load: 400kg for 4-6 persons



Platform size: 1315*975mm
Reserved size: 1395*1386mm
Rated load: 400kg for 4-6 persons



Platform size: 1315*1075mm
Reserved size: 1395*1486mm
Rated load: 400kg for 4-6 persons

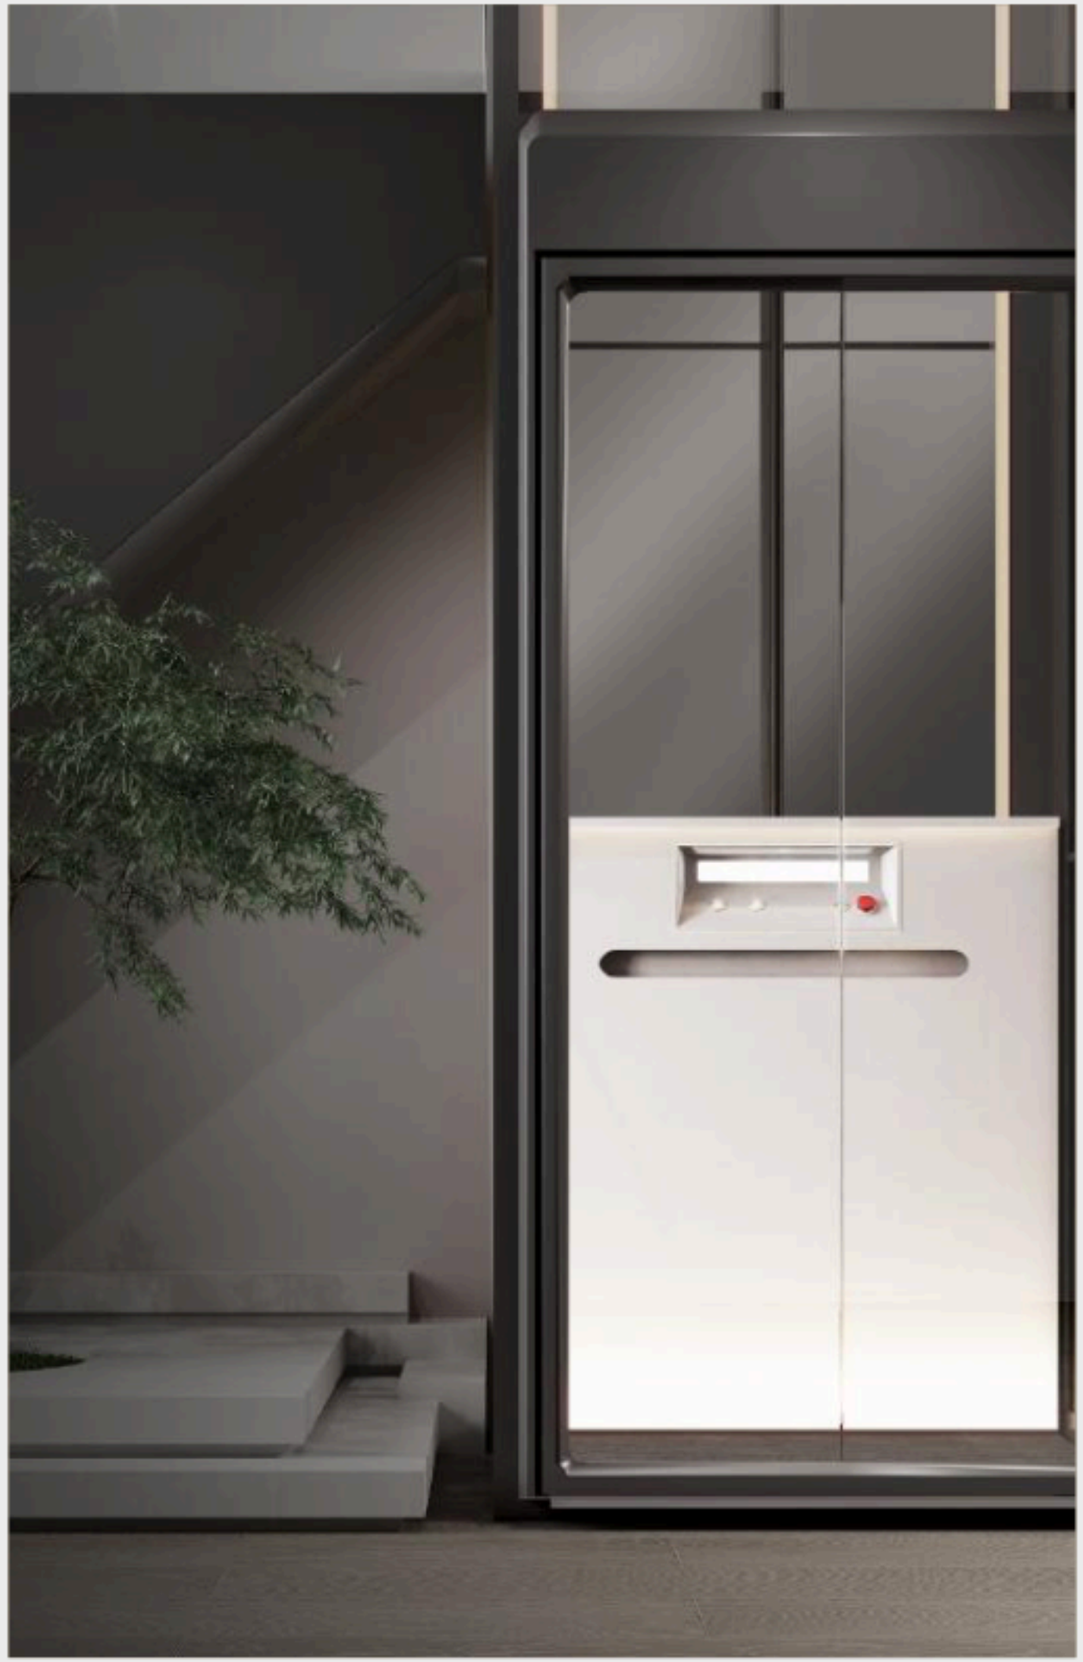


innovative C-shaped platform

The HA Series features a compact design with maximum space efficiency:

- Minimum Equipment Width of 840mm
- Mirror-Design Artist Background Wall for a more spacious feel
- Built-In Metal Handrail for an elegant appearance
- 19 Standard Sizes for flexible options












Product	Configuration description
Drive Mode	Screw Nut Drive Control
Control System	SSID Intelligent Control System
Door Lock System	Electronic and Mechanical Safety Interlock
Silent Brake System	SSG Brake System
Rolling Guide Shoes	Silent Operation, No Lubrication
Automatic Lubrication System	Continuous Lubrication, Extends Core Components' Lifespan
Wireless Emergency Communication	Can Store 3 Emergency Contact Numbers, One-touch Dial
Automatic Leveling on Power Outage	Dual Protection (Battery + Mechanical Handle)
Touch Control External Call	Precise Control, Easy Operation
Built-in Functions	SAFS Full Safety System, ID Intelligent Elevator Door, BASS Battery Monitoring System, OLP Overload Protection, UPS Backup Power Emergency Descent, etc.
Door Lock System	Electronic and Mechanical Safety Interlock
Emergency Brake	Respond to All Emergencies
Control Panel	Touch Panel, Precise Control, Easy Operation
Platform Safety Frame	Emergency Stop on Touch
Speed	Standard: 0.15m/s Optional: 0.3m/s
Shaft Profiles	Using High Grade (6005-T5) Aerospace Aluminum Profiles
Shaft Glass	Using Double-layer Laminated Explosion-proof Tempered Glass (5mm + 0.76mm + 5mm)
Sustainability	95% of Product Components are Recyclable
Technical Standards	Referencing European Standards EN81-41, European Machinery Directive 2006/42/EC

KÖHLER
Elevator & Escalator

Higher standards create higher quality.

Opening method	Lifting speed	Calling	Background	Shaft
Default | single door Optional | double doors	Default |0.15 m/s Optional |0.3 m/s	Default | auto call Optional | fingerprint call	Default | Standard Wall Optional Customized Wall	Glass shaft Steel plate shaft

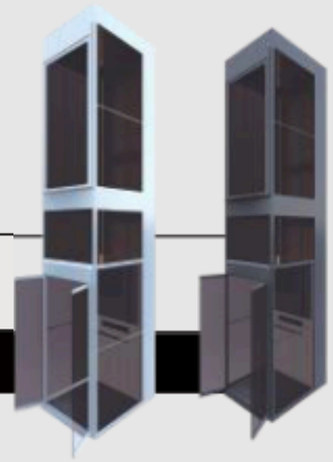

ASTA | SIZE CHART

Width * Depth mm

HA900

Reserved width: 870mm
B side door size: 628mm

S Reserved depth: 1173mm
AC door size: 660mm

M Reserved depth: 1313mm
AC door size: 800mm


L Reserved depth: 1413mm
AC door size: 900mm




Platform size: 787*600mm
Reserved size: 870*930mm
Rated load: 250kg for 1-2 persons



Platform size: 787*830mm
Reserved size:870*1173mm
Rated load: 250kg for 2-3 persons



Platform size: 787*970mm
Reserved size: 870*1313mm
Rated load: 250kg for 2-3 persons



Platform size: 787*1070mm
Reserved size: 870*1413mm
Rated load: 250kg for 2-3 persons

HA1000

Reserved width: 935mm
B side door size: 660mm



Platform size: 852*830mm
Reserved size: 935*1173mm
Rated load: 250kg for 2-3 persons



Platform size: 852*970mm
Reserved size: 935*1313mm
Rated load: 250kg for 2-3 persons



Platform size: 852*1070mm
Reserved size: 935*1413mm
Rated load: 400kg for 5-6 persons

HA1100

Reserved width: 1075mm
B side door size: 800mm



Platform size: 992*830mm
Reserved size: 1075*1173mm
Rated load: 250kg for 2-3 persons




Platform size: 992*970mm
Reserved size: 1075*1213mm
Rated load: 400kg for 5-6 persons



Platform size: 992*1070mm
Reserved size: 1075*1413mm
Rated load: 400kg for 5-6 persons

HA1200

Reserved width: 1175mm
B side door size: 900mm



Platform size: 1092*830mm
Reserved size: 1175*1173mm
Rated load: 400kg for 5-6 persons



Platform size: 1092*970mm
Reserved size: 1175*1313mm
Rated load: 400kg for 5-6 persons



Platform size: 1092*1070mm
Reserved size: 1175*1413mm
Rated load: 400kg for 5-6 persons

HA1300


Reserved width: 1295mm
B side door size: 900mm



Platform size: 1212*830mm
Reserved size: 1295*1173mm
Rated load: 400kg for 5-6 persons



Platform size: 1212*970mm
Reserved size: 1295*1313mm
Rated load: 400kg for 5-6 persons




Platform size: 1212*1070mm
Reserved size: 1295*1413mm
Rated load: 400kg for 5-6 persons

HA1400


Reserved width: 1395mm
B side door size: 900mm



Platform size: 1312*830mm
Reserved size: 1395*1173mm
Rated load: 400kg for 5-6 persons



Platform size: 1312*970mm
Reserved size: 1395*1313mm
Rated load: 400kg for 5-6 persons



Platform size: 1312*1070mm
Reserved size: 1395*1413mm
Rated load: 400kg for 5-6 persons

Special Solutions for Unique Spaces

Master of Aesthetic Art


The new generation of car-type screw homelifts is specially designed for villas or duplexes with existing shafts. It is installed in the shaft and is more integrated into the existing architectural form. It not only has the characteristics of screw-type homelifts such as no pit and no machine room, high space utilization, high safety, and easy maintenance, but also takes high-end art as inspiration. The interior decoration design of the car is customized according to personal preferences, which helps to promote a better life and worry-free travel.




KÖHLER
Elevator & Escalator

The Series is a car-type screw-driven lift designed for small shafts and large spaces, combining aesthetic appeal and practical functionality to create a comfortable home environment.No Pit or Machine Room Required.Enhanced Space Utilization.Customizable Interior Design for a personalized touch.Specifically crafted for villas or duplex homes with existing shafts, the HS Series allows for complete interior customization, providing a unique experience with distinct personality and texture.



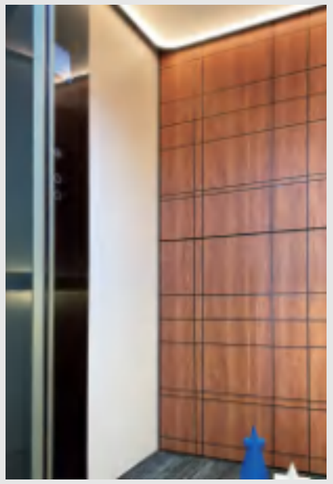

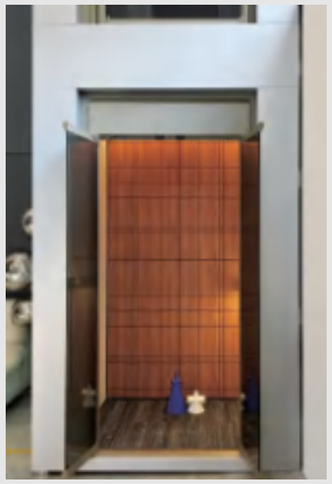

Main function configuration table

Product	Configuration description
Drive Mode	Screw Nut Drive Control
Control System	SSID Intelligent Control System
Door Lock System	Electronic and Mechanical Safety Interlock
Silent Brake System	SSG Brake System
Rolling Guide Shoes	Silent Operation, No Lubrication
Automatic Lubrication System	Continuous Lubrication, Extends Core Components' Lifespan
Wireless Emergency Communication	Can Store 3 Emergency Contact Numbers, One-touch Dial
Automatic Leveling on Power Outage	Dual Protection (Battery + Mechanical Handle)
Touch Control External Call	Precise Control, Easy Operation
Built-in Functions	SAFS Full Safety System, ID Intelligent Elevator Door, BASS Battery Monitoring System, OLP Overload Protection, UPS Backup Power Emergency Descent, etc.

Product	Configuration description
Door Lock System	Electronic and Mechanical Safety Interlock
Emergency Brake	Respond to All Emergencies
Control Panel	Touch Panel, Precise Control, Easy Operation
Platform Safety Frame	Emergency Stop on Touch
Speed	Standard: 0.15m/s Optional: 0.3m/s
Shaft Profiles	Using High Grade (6005-T5) Aerospace Aluminum Profiles
Shaft Glass	Using Double-layer Laminated Explosion-proof Tempered Glass (5mm + 0.76mm + 5mm)
Sustainability	95% of Product Components are Recyclable
Technical Standards	Referencing European Standards EN81-41, European Machinery Directive 2006/42/EC

SPECIAL | SIZE CHART

Width * Depth mm

Name	Size	Door Opening	Platform	Reserved	Rated Load
HS1000	S	660	853x951	1055x1372	250/2-3
	M	B 660	853x1091	1055x1512	250/2-3
	L	660	853x1191	1055x1612	250/2-3
HS1000	S	660	861x943	1055x1330	250/2-3
	M	AC 800	861x1083	1055x1470	250/2-3
	L	900	861x1183	1055x1570	250/2-3
HS1100	S	660	953x951	1155x1372	250/2-3
	M	B 660	953x1091	1155x1512	250/2-3
	L	660	953x1191	1155x1612	250/2-3
HS1100	S	660	961x943	1155x1330	250/2-3
	M	AC 800	961x1083	1155x1470	400/4-6
	L	900	961x1183	1155x1570	400/4-6
HS1200	S	800	1073x951	1275x1372	400/4-6
	M	B 800	1073x1091	1275x1512	400/4-6
	L	800	1073x11191	1275x1612	400/4-6
HS1200	S	660	1081x943	1275x1330	400/4-6
	M	AC 800	1081x1083	1275x1470	400/4-6
	L	900	1081x1183	1215x1570	400/4-6
HS1300	S	900	1173x951	1375x1372	400/4-6
	M	B 900	1173x1091	1375x1512	400/4-6
	L	900	1173x1191	1375x1612	400/4-6
HS1300	S	660	1181x943	1375x1330	400/4-6
	M	AC 800	1181x1083	1375x1470	400/4-6
	L	900	1181x1183	1375x1570	400/4-6
HS1400	S	900	1273x951	1475x1372	400/4-6
	M	B 900	1273x1091	1475x1512	400/4-6
	L	900	1273x1191	1475x1612	400/4-6
HS1400	S	660	1281x943	1475x1330	400/4-6
	M	AC 800	1281x1083	1475x1470	400/4-6
	L	900	1281x1183	1475x1570	400/4-6
HS1500	S	900	1350x951	1552x1372	400/4-6
	M	B 900	1350x1091	1552x1512	400/4-6
	L	900	1350x1191	1552x1612	400/4-6
HS1500	S	660	1358x943	1552x1330	400/4-6
	M	AC 800	1358x1083	1552x1470	400/4-6
	L	900	1358x1183	1552x1570	400/4-6



KÖHLER
Elevator & Escalator

KOHLER ELEVATOR CORPORATION JOINT STOCK COMPANY
Hotline: 19004535
Contact us: 0986925222
Addess: U03-L67, Do Nghia Urban Area, Yen Nghia Ward, Hanoi City, Vietnam
Email: contact@thangmaykohler.vn
Website: https://www.thangmaykohler.vn/